



TITLE: REMOTE TRANSLATION MECHANISM FOR A MULTINODE SYSTEM
INVENTOR NAME: Kitrick Sheets et al.
SERIAL NO.: 10/643,758

1/11

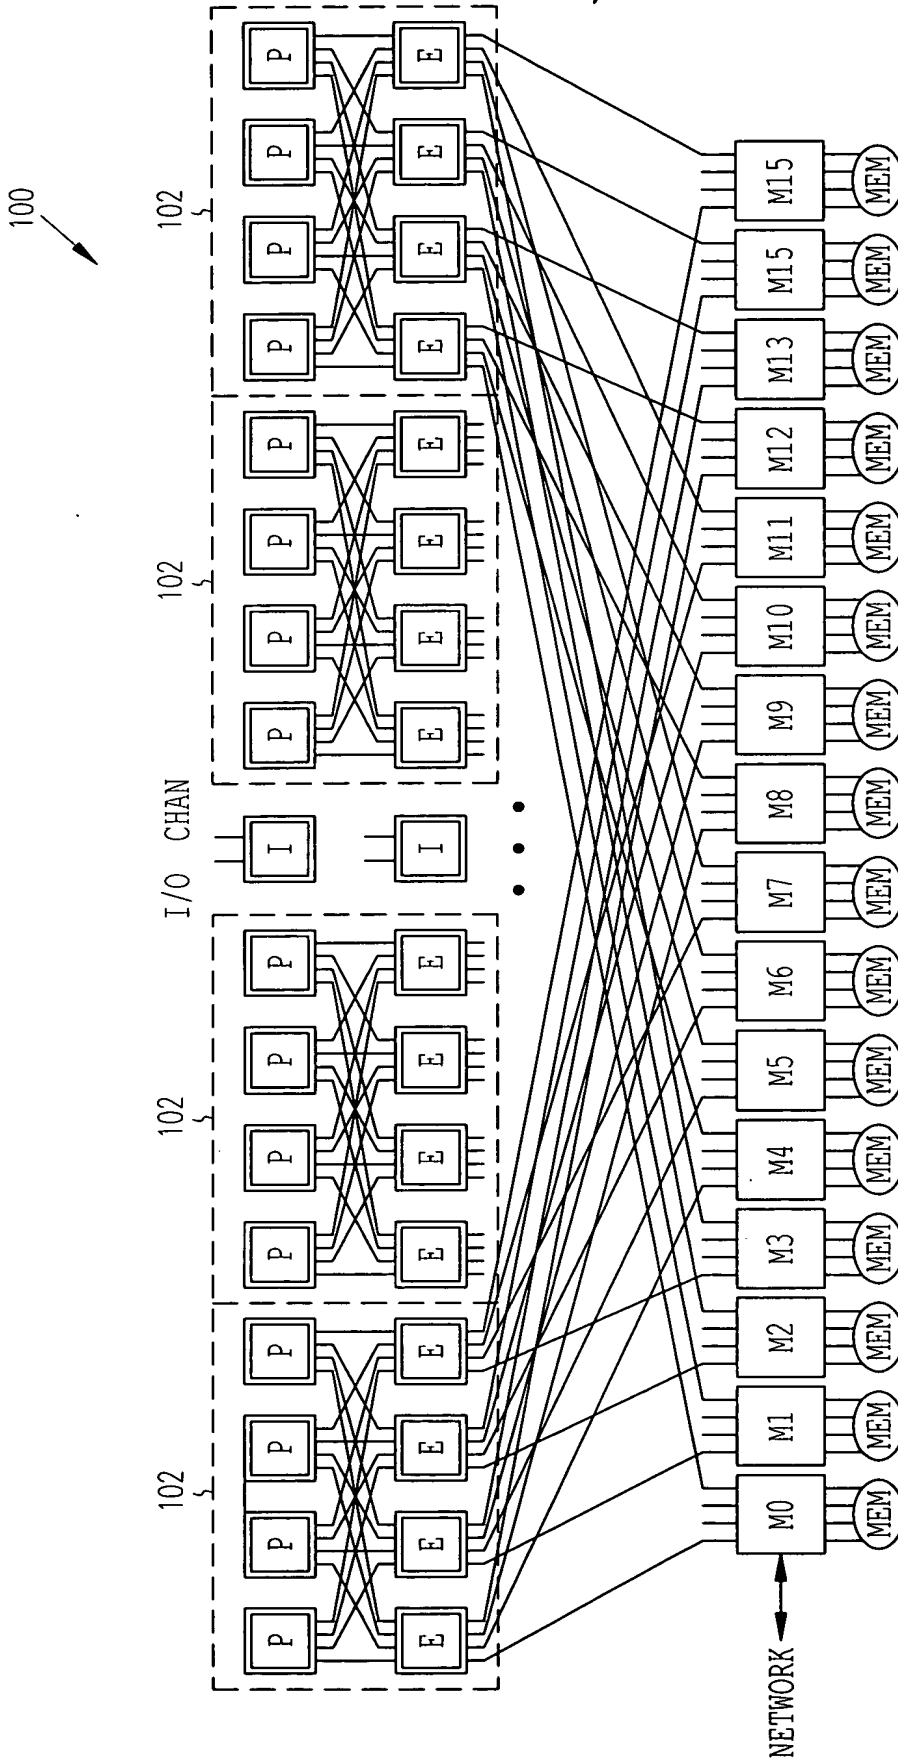


FIG. 1

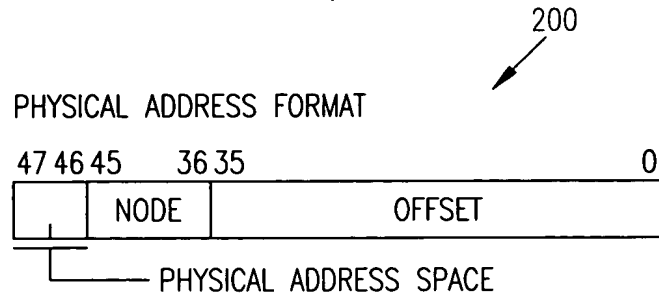


FIG. 2A

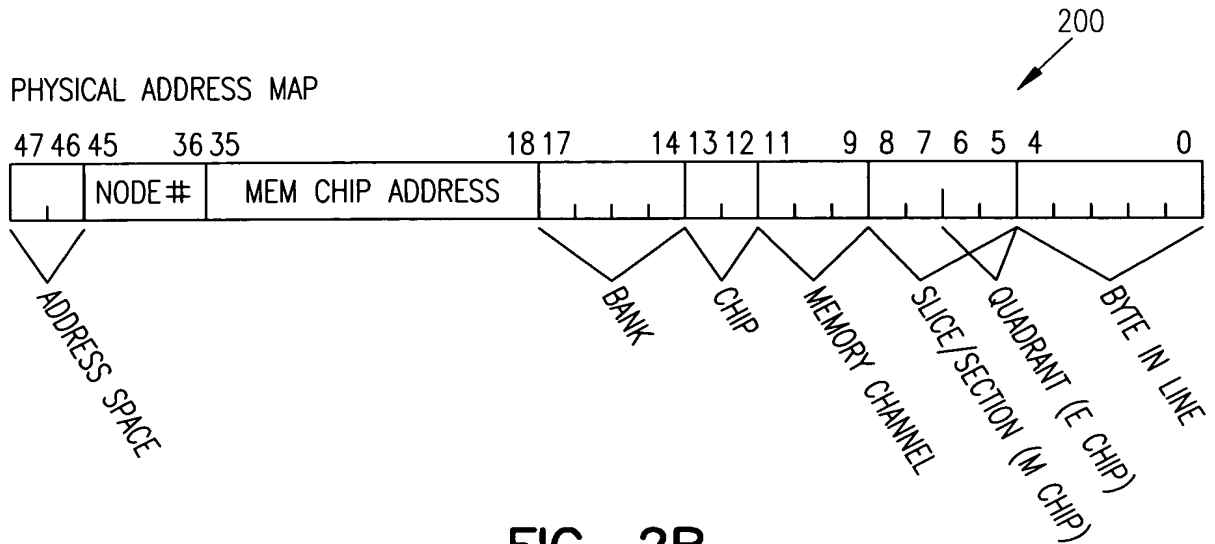


FIG. 2B

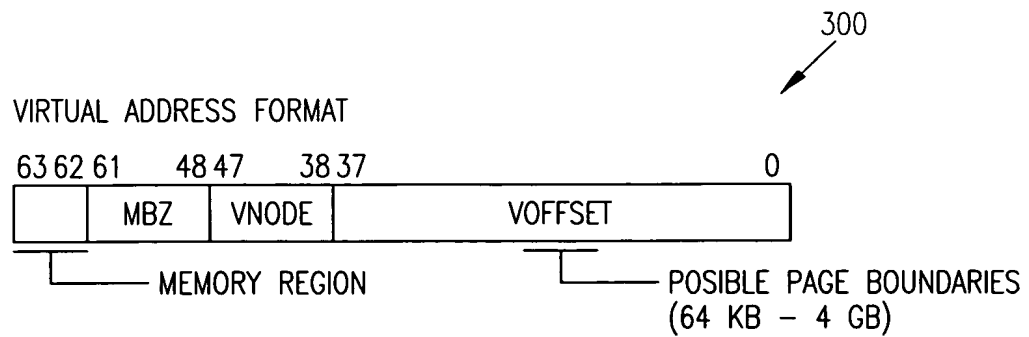


FIG. 3

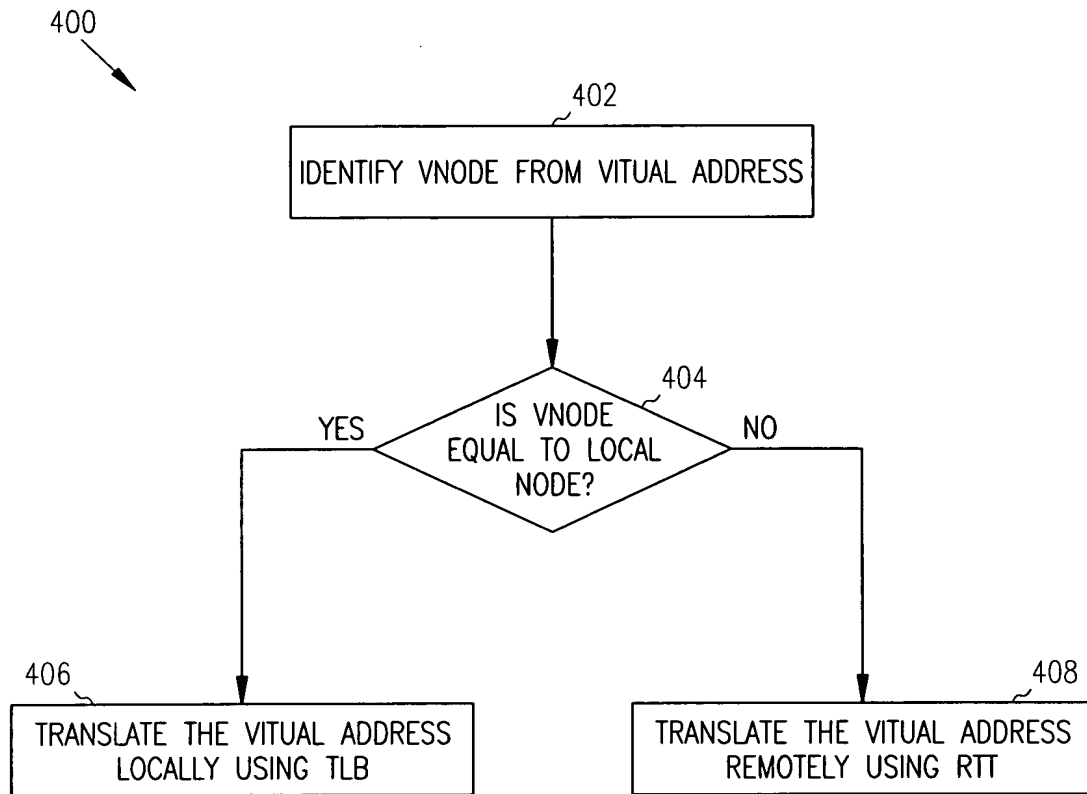


FIG. 4

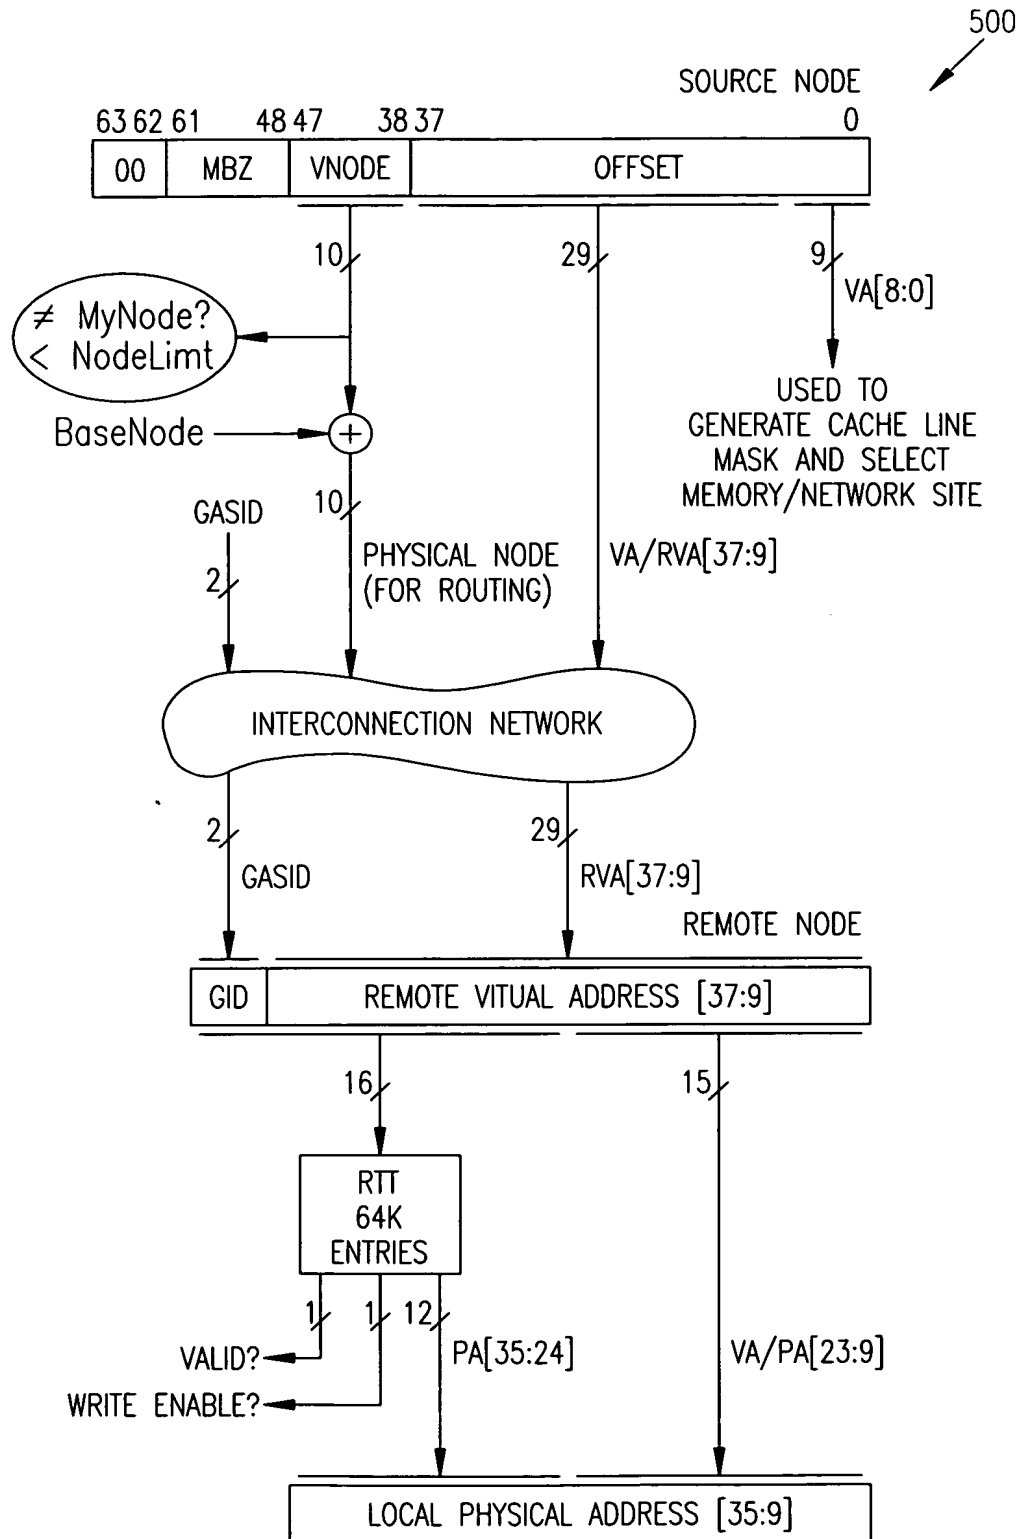


FIG. 5

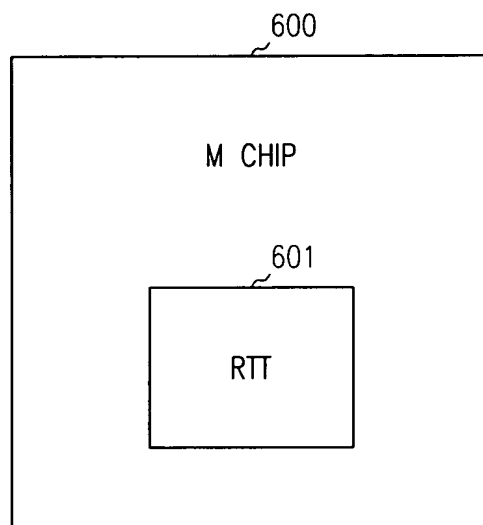


FIG. 6A

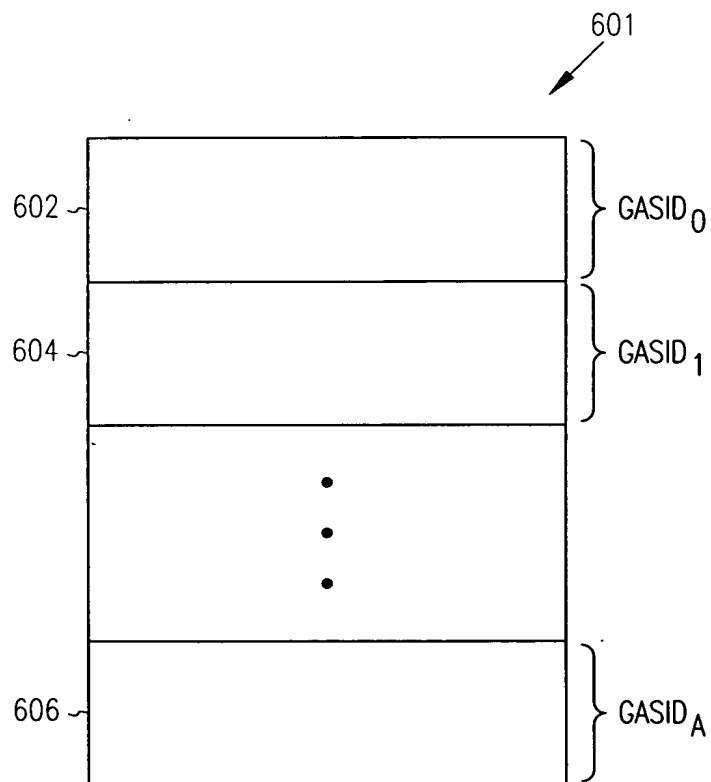


FIG. 6B

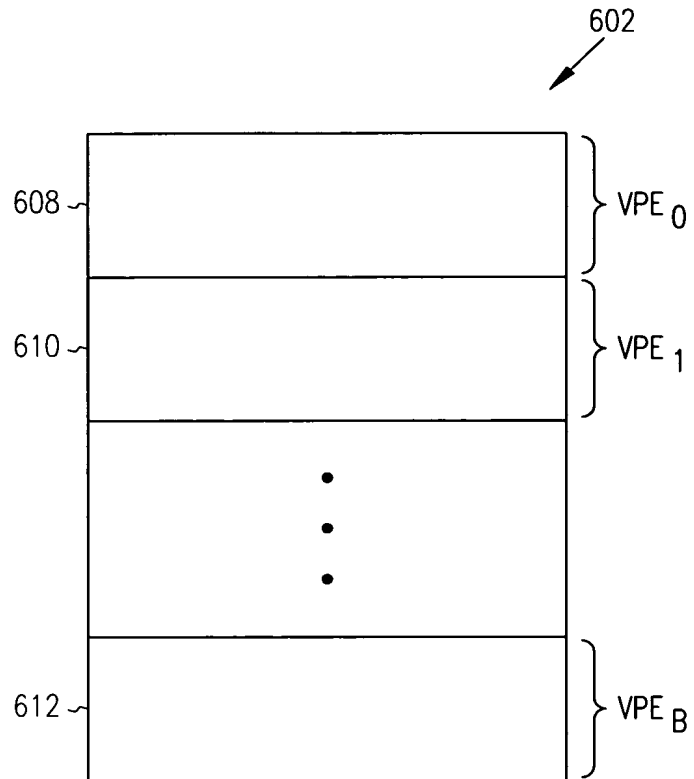


FIG. 6C

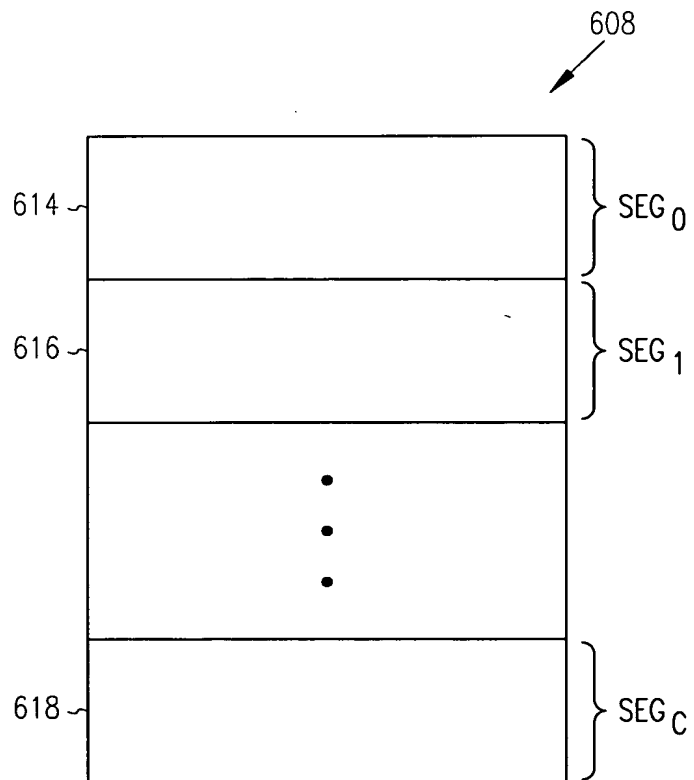


FIG. 6D



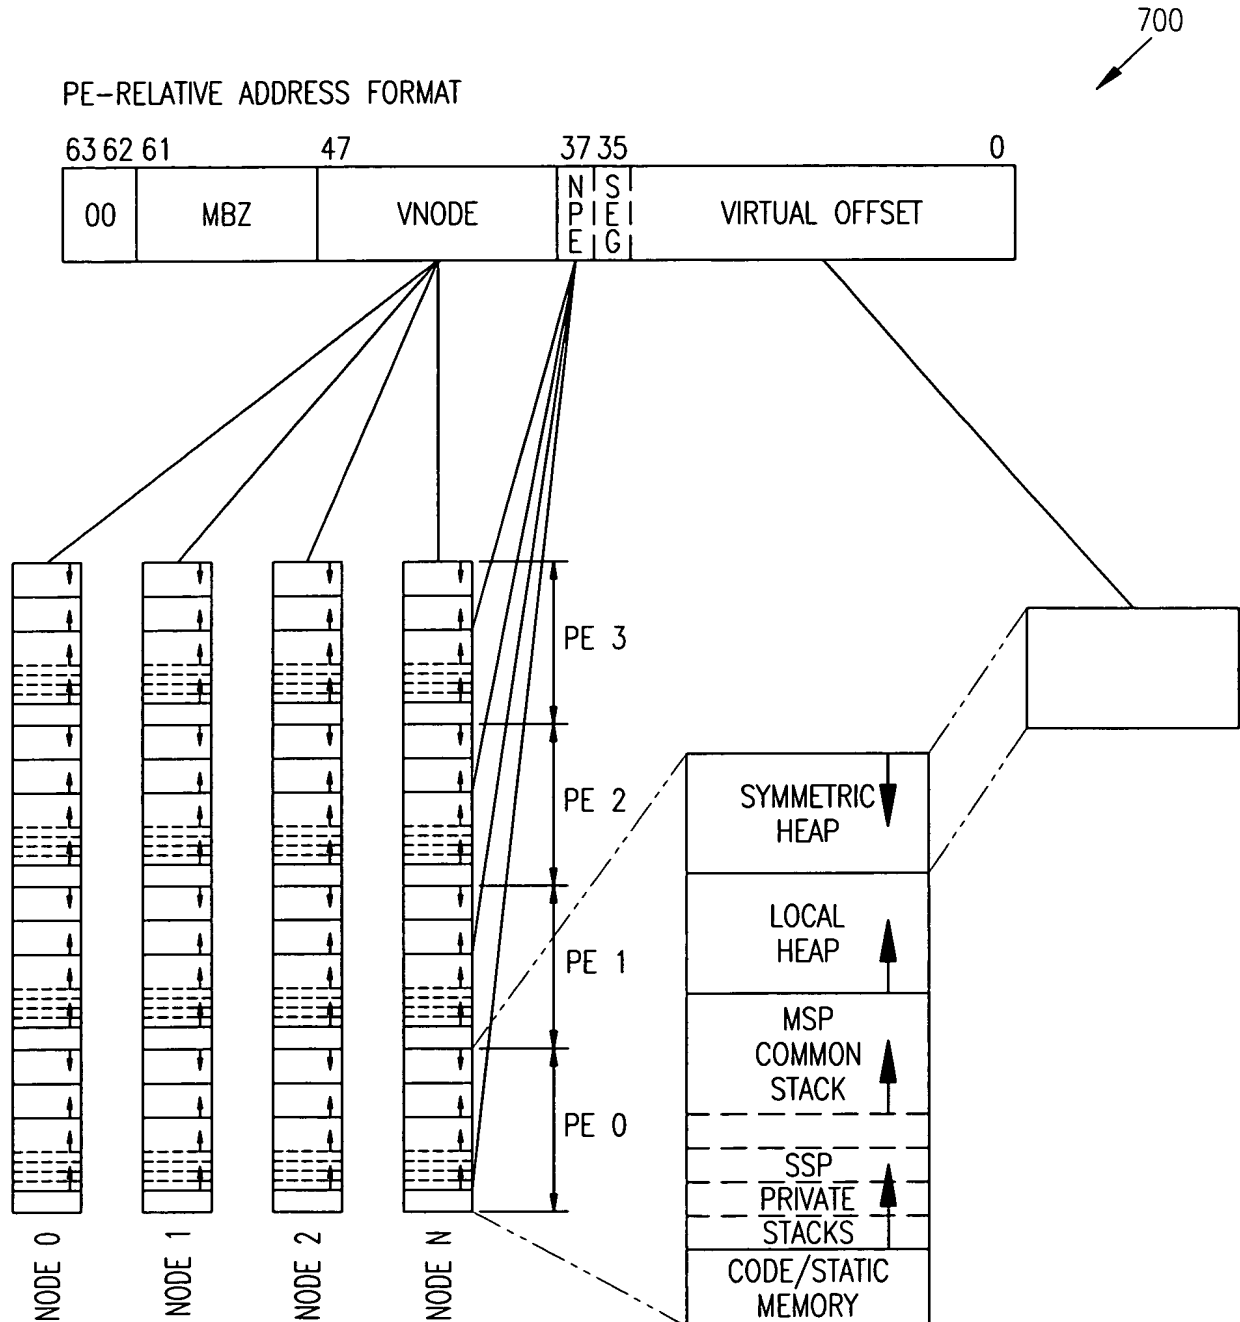


FIG. 7

1. INITIAL PE CREATED AT EXEC ()



2. PEs ARE CREATED ACROSS NODE SPACE

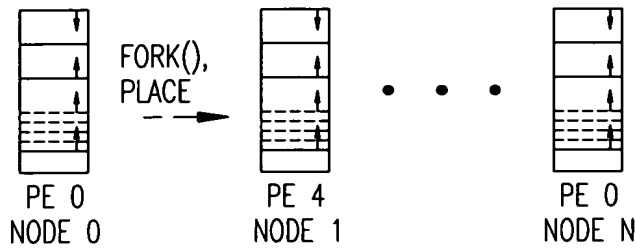

3. LOCAL ADDRESS SPACE AND PEs CREATED

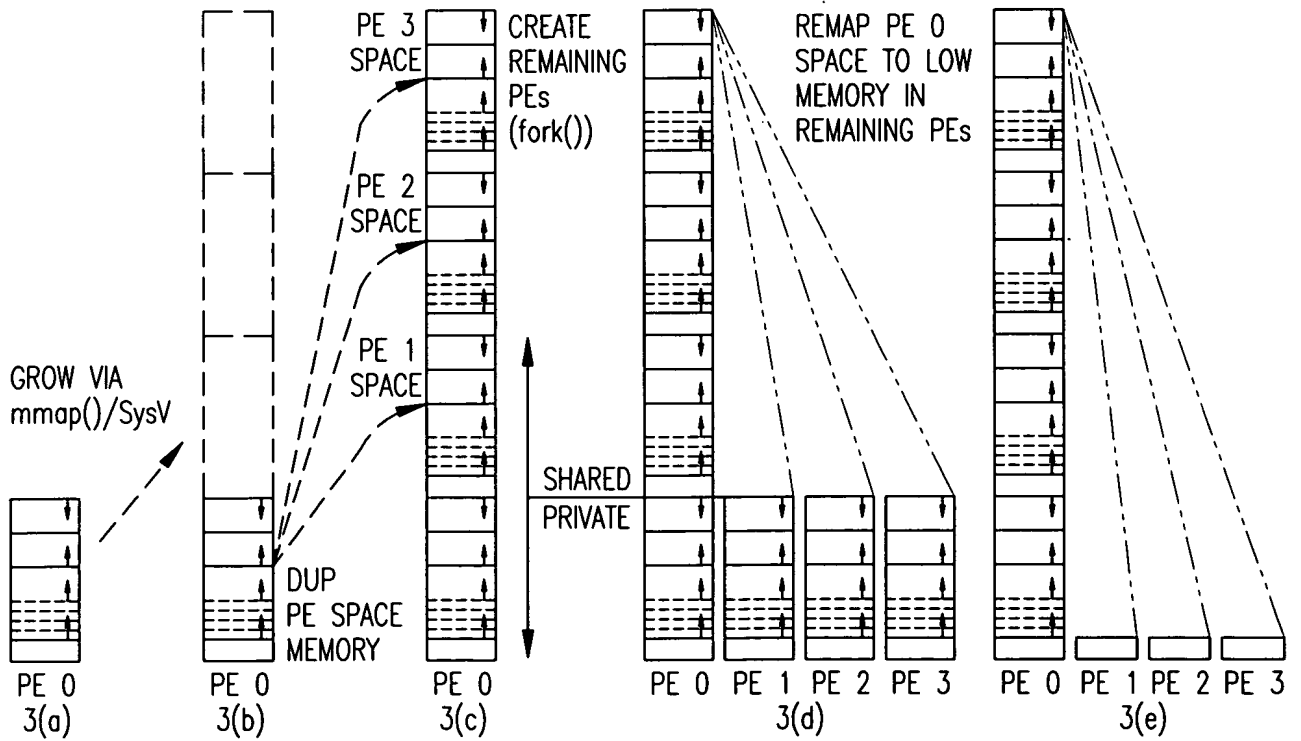


FIG. 8

9/11

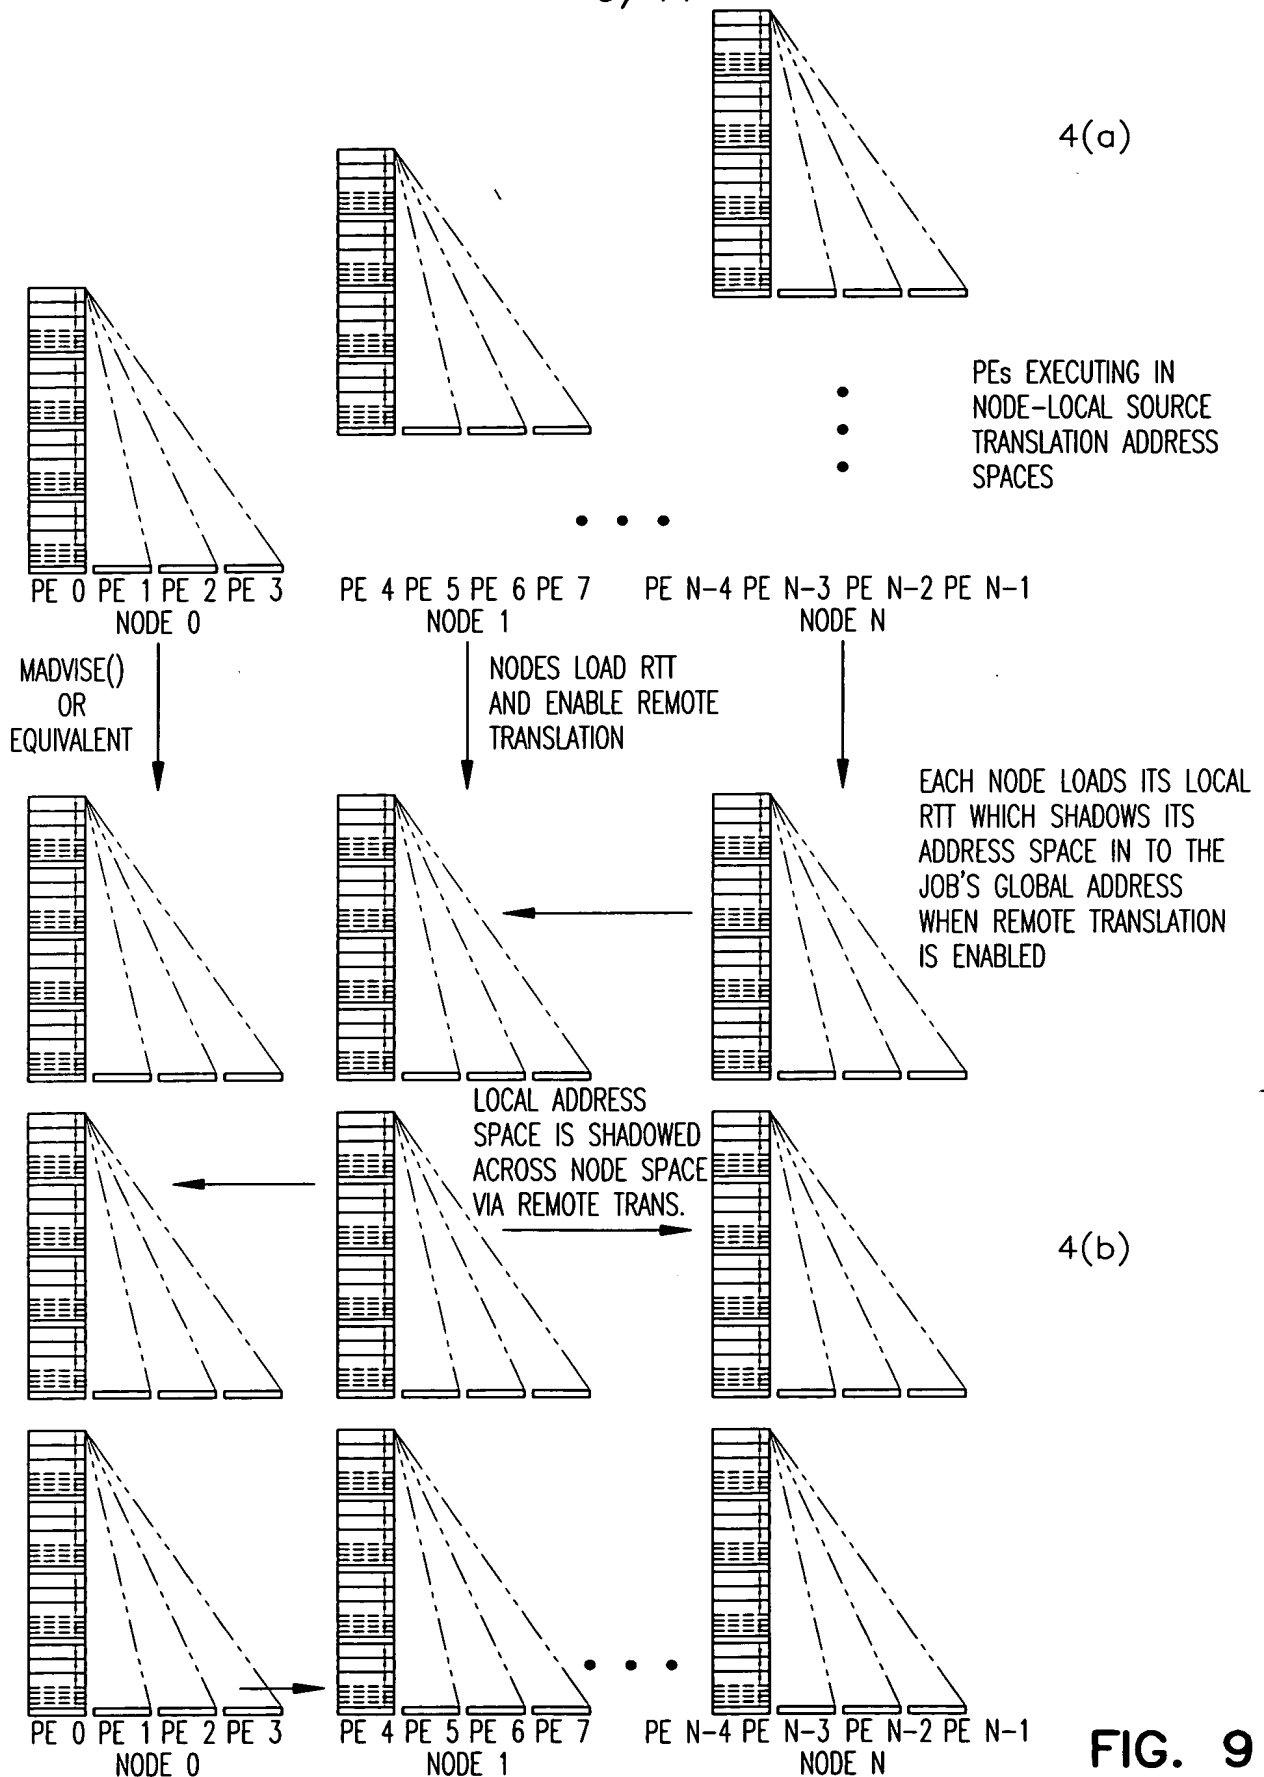


FIG. 9

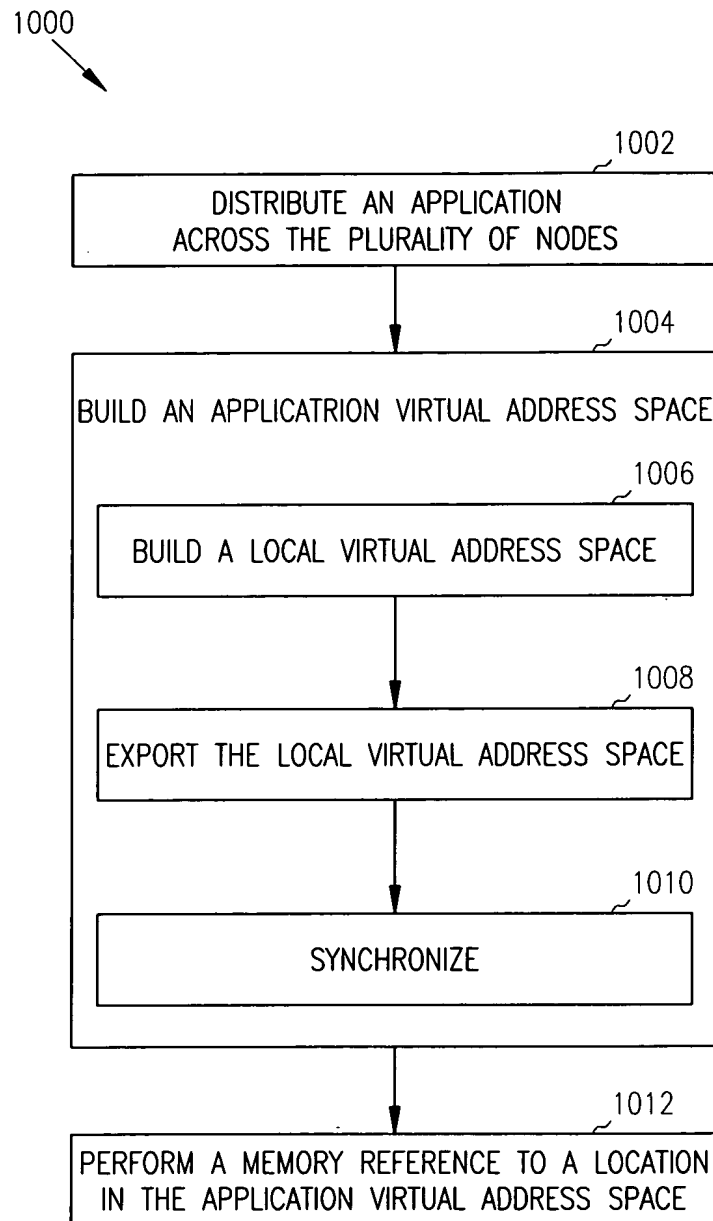


FIG. 10

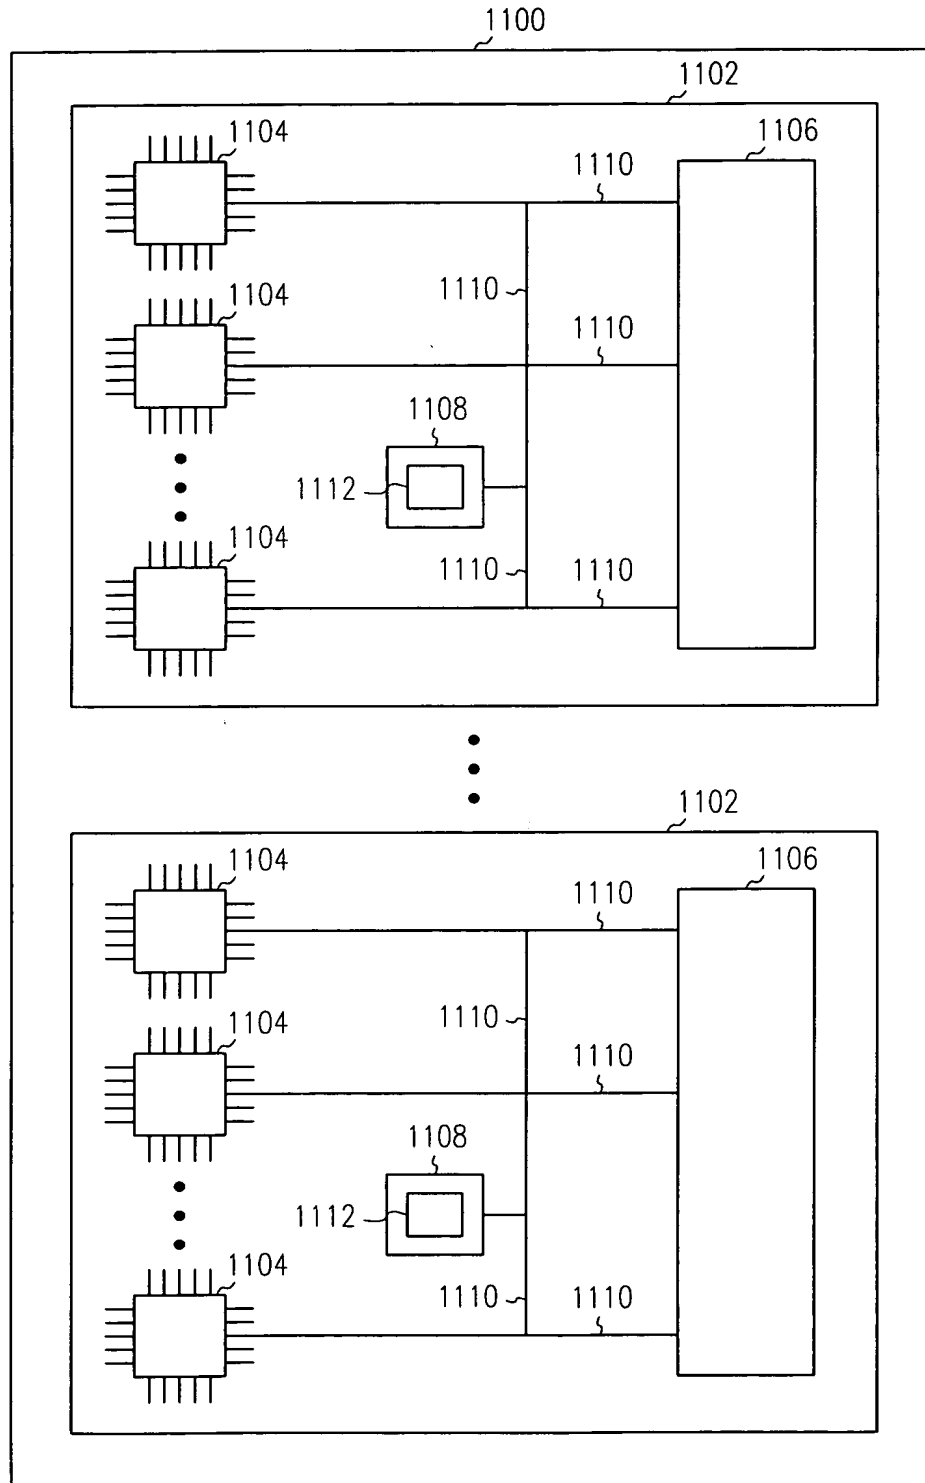


FIG. 11